

# SERIES 433

## TRIPLE LINEAR BAY

**PHOTONIC.**  
LIGHTING SOLUTIONS



### OVERVIEW

A high performance linear highbay, Series 433 utilises the latest Vossloh Schwabe optics to maximise light output with accurate beam control. Available with a range of optics, and multiple outputs up to 20000 lumens, the Series 433 can also be built with dimming, wireless or daylight harvesting sensors, alongside emergency options for maximum flexibility.

### FEATURES


- 4ft with multiple power options with lumen outputs up to 20000 lumens
- Vossloh Schwabe LED, Optic & Driver Combination
- Choice of optics including Diffused, 110°, 90°, 60° & High Rack
- Multiple mounting options including suspended or surface
- Optional On/Off sensor or daylight & dimming control
- Emergency option available
- 50,000 hours' lifetime with 5-year warranty

### OPTIONS

- Colour Temperature 3000, 4000, 5000 & 6500K
- Surface mount & Besa options
- Suspension requires extra accessory kit
- Microwave, PIR & daylight sensor options
- Emergency Options: Standard or Self-Test
- Dimming Option Dali, 1-10 Volt or Philips Smart Sensor



### PRODUCT DIMENSIONS

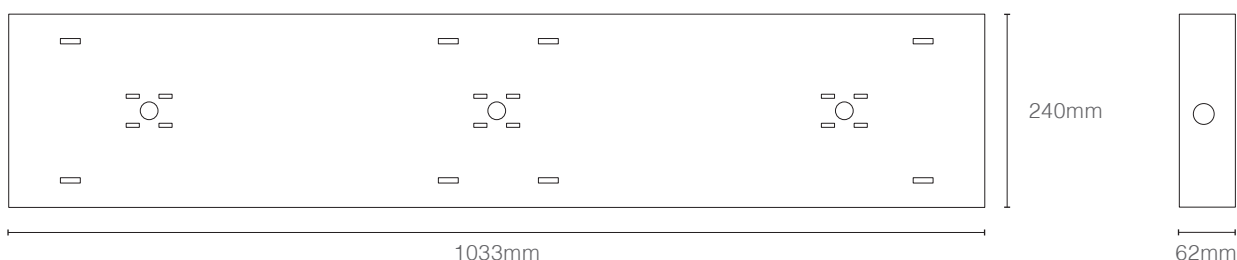

01282 476600 | [info@photonighting.co.uk](mailto:info@photonighting.co.uk)

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

[www.photonighting.co.uk](http://www.photonighting.co.uk)

SERIES 433 SPECIFICATION SHEET



Series 433 with 7m PIR sensor








Longitudinal view



Series 433 smart linear installation

**PHOTOMETRIC PERFORMANCE**



**PRODUCT SPECIFICATION**

**433 - LM - BA - CCT - CTRL - SP - EMG**

Lumens (LM)	
Code	Description
<b>220</b>	22000 lumens
<b>280</b>	28000 lumens
<b>310</b>	31000 lumens

CCT (CCT)	
Code	Description
<b>840</b>	80 CRI 4000K
<b>850</b>	80 CRI 5000K
<b>865</b>	80 CRI 6500K

Control (CTRL)	
Code	Description
<b>N</b>	No Controls
<b>D</b>	Dali
<b>D2</b>	Dali 2
<b>DI</b>	Dali Industry
<b>10</b>	1-10v dim
<b>ID</b>	Industry
<b>RD</b>	Retractive Dim
<b>O7</b>	PIR On/Off 7m
<b>O12</b>	PIR On/Off 12m
<b>D12</b>	PIR Dim 12m
<b>D7</b>	PIR Dim 7m
<b>P16</b>	Philips Smart PIR 16m
<b>L12</b>	Litelp PIR 12m
<b>L16</b>	Litelp PIR 16m
<b>H16</b>	Hub Sense 16m

Emergency (EMG)	
Code	Description
<b>L3</b>	3W Lithium
<b>SL3</b>	3hr 3W Lithium Self-test
<b>L6</b>	6W Lithium
<b>SL6</b>	3hr 6W Lithium Self-test
<b>DE3</b>	Dali Emergency 3W
<b>D2E3</b>	Dali 2 Emergency 3W

Beam Angle (BA)	
Code	Description
<b>DF</b>	Diffused 110°
<b>EW</b>	Extra Wide 110°
<b>W</b>	Wide 90°
<b>M</b>	Medium 60°
<b>HR</b>	High Rack
<b>RS</b>	Retail SYM

Sport Safe (SP)	
Code	Description
<b>SP</b>	Sports Cage
<b>Blank</b>	No Sports Cage

Accessories	
Code	Description
<b>433</b>	SUS

