

SERIES 700

Streetlight



OVERVIEW

Series 700 Street light offers a competitive solution that has a simple and smart design. With an Anti-UV PC Lens, it will not crack or yellow to maintain a stable brightness and high efficiency of 135lm/w. The flexible bracket design can be Wall mounted or both Horizontal and Vertical pole mounted. The bracket also has an adjustable angle to allow for the optimum settings.

FEATURES

- 135lm/W 4000K
- 3-pin NEMA socket & cap as standard
- up to Ø60mm pole and wall mounting
- Adjustable spigot mounting for angle adjustment
- 10kv surge protection

OPTIONS

- 30W, 50W & 100W options
- 3 pin NEMA photocell
- 76mm pole adaptor available



T: 01282 476600 | E: info@photoniclighting.co.uk


Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk



SERIES 700

Streetlight

PRODUCT DIMENSIONS

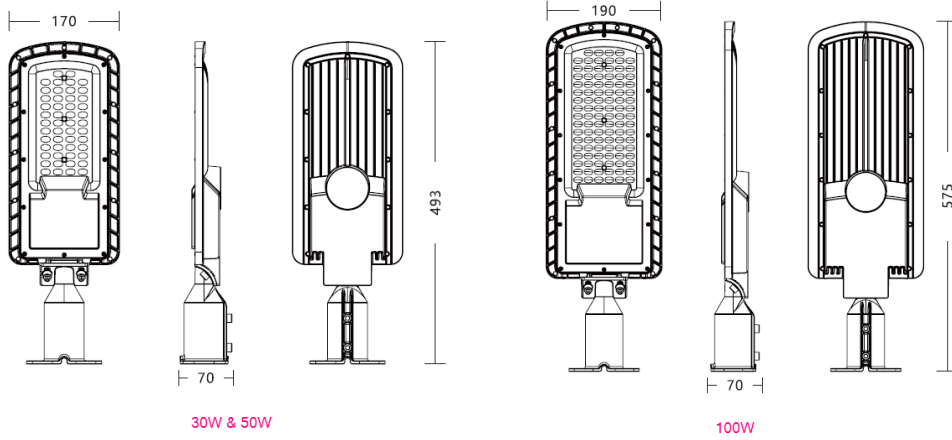

PHOTOMETRIC

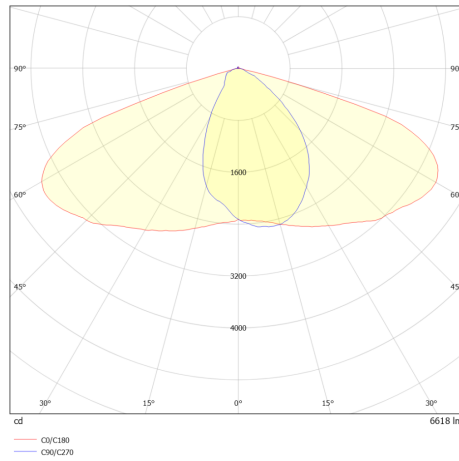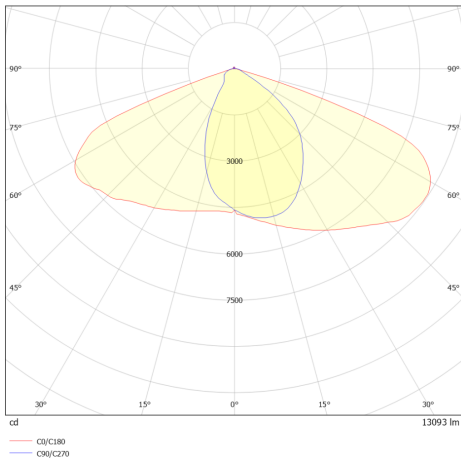

T: 01282 476600 | E: info@photonighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photonighting.co.uk

SERIES 700

Streetlight

PRODUCT SPECIFICATION

700 - (LM) - (CCT) - (CTRL) - (MN)

Lumens (LM)	
Code	Description
40	4000 lumens (30W)
67	6700 lumens (50W)
135	13500 lumens (100W)

Correlated Colour Temperature (CCT)	
Code	Description
840	80 CRI 4000K

Control (CTRL)	
Code	Description
NEMA3	NEMA 3 socket for accessories

Mounting (MN)	
Code	Description
60	60mm diameter spigot
60-W	60mm diameter spigot with integrated wall bracket

Accessories	
Code	Description
700-N3PHO	Nema 3 Photocell
700-76	60mm to 76mm spigot adaptor

T: 01282 476600 | E: info@photoniclighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk