Installation Instructions
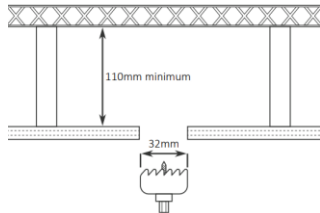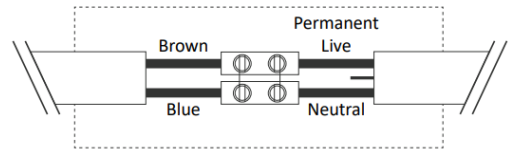
Series 501

PHOTONIC.
LIGHTING SOLUTIONS

1. Ensure power is off before starting. Cut Ø32mm cutout in required surface.
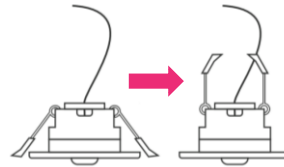
2. Wire in luminaire according to appropriate regulations.
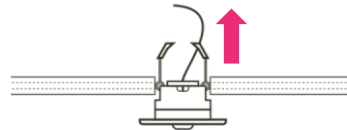
3. Complete labels for date of commission.

4. Push up springs to prepare for install.
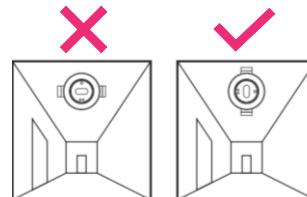
5. Feed body into cutout.
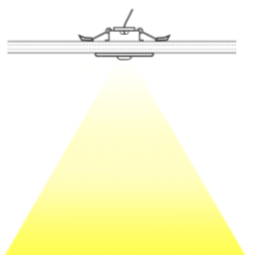
6. Feed in Luminaire head through hole.

7. Ensure springs clip down on ceiling to ensure flush finish with ceiling.

8. For corridor lens, ensure the correct orientation for best illumination.

9. Switch on power. Test as required.

Green LED	Red LED	Indicator LED Status
On	Off	Standby
Slow flash	Off	Charging
Fast flash	Off	Function test/Duration test in progress
Off	On	Battery Disconnected / Duration test failed
Slow flash	Slow flash	Battery temperature out of range
Off	Slow flash	Light source faulty